

KOBELCO

Performance  Design

SK130_{LC}

- Bucket capacity:
0.24 – 0.70 m³
- Engine power:
78.5 kW / 2,000 min⁻¹
- Operating weight:
14,200 – 17,100 kg



Complies with the EU Stage V
exhaust emission regulation

Built for Perfectionists



Performance Design

SK130LC of KOBELCO has realised a completely new value by harmonising PERFORMANCE – greater efficiency and productivity with an increased power and speed and DESIGN – operator-based operability and comfort, refusing to accept any compromises.

In pursuit of unique and matchless machines which are unforgettable once you use them, KOBELCO will continue to rise to meet every challenge.



THE ULTIMATE IN SIMPLE AND ELEGANT DESIGN

Our pursuit of functional beauty and aesthetic sense produced a new interior design.

Jog dial

This jog dial integrates multiple functions to realise simple operations. Even with gloved hands, the operator can set various machine conditions without stress.

LED backlights

The switches and dials have LED backlights – they provide a bright, clear view in the dark and set a luxurious mood.







UNFORGETTABLE COMFORT

① Air suspension seat

A GRAMMER* seat is installed as standard equipment, which achieves excellent shock absorption and superior ride comfort.

*GRAMMER is trademark of GRAMMER AG, registered in Germany and other countries.

② Air conditioner blowing from the rear

Air is blown against the operator's waist and the back of their head, offering more comfortable operation.

③ Lever angles allow for comfortable operations

The operator can move the levers horizontally without twisting their wrist, which reduces the fatigue caused by the operations.



New Hydraulic Control


Our newly upgraded hydraulic control system responds to shorter lever strokes than current models, delivering swifter, more precise movement and improved lever operability.

④ LED door light

The LED interior light automatically turns on when the door is opened or when the ignition is set to OFF.

This ensures easy entry and exit at nighttime.

⑤ Parallel wipers secure a wide field of view

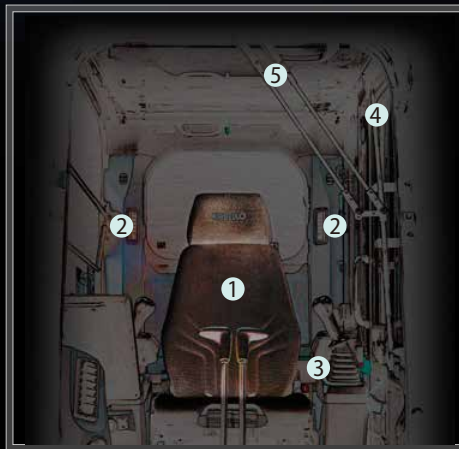

KOBELCO



04:33



SETTING MENU



PICTURE OF
CAMERA



CLOCK
SETTING



SCREEN
BRIGHTNESS



MAINTENANCE



CONSUMPTION



LANGUAGE
SELECTION







PRESSURE
RELEASE



SAFETY ON FULL DISPLAY

Standard 3 Sides Safety Camera System

Our high-resolution, large display shows right, left and rear side cameras together. Multiple display allows the operator to customize viewing needs to enhance operator awareness and jobsite safety.




Large 10-Inch Color Monitor

The easy-to-operate menu screen and recognizable icons assist the operator to select the most important information needed to ensure jobsite safety and machine control.



Dial in the Right Information

Simply turn the jog dial to the right or left to select an operational feature, then press the dial to confirm selection.

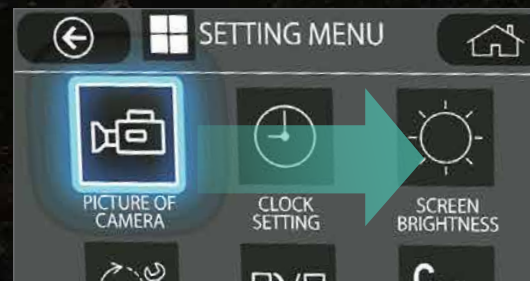




EXPERIENCING A COMPETENT PERFORMANCE

Excellent machine stability, plus a STAGE V compliant engine

Equipped with the new STAGE V engine, the SK130LC features outstanding stability thanks to an innovative new shape for conventional excavator, as well as a larger counterweight.

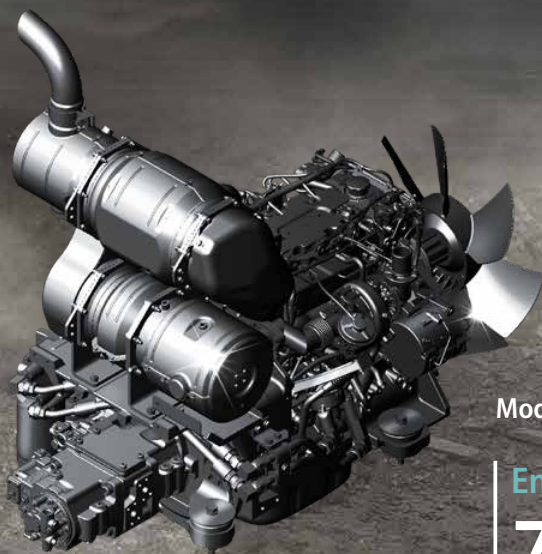

Model: ISUZU 4JJ1XDDV A01

Engine output

78.5 kW / 2,000 min⁻¹



»»» Bucket digging force

105.4 kN

Lifting capacity

3,890 kg

(Reach 6.0 m, ground level over front 2.84 m arm with additional 600 kg weight)



GREATER MULTI-FUNCTION CAPABILITIES

Attachment mode

The flow-rate modes of the bucket, breaker, nibbler, and rotating grapple are set before delivery, which allows you to start operating immediately. Mode settings for other attachments, such as the tilt rotator, can easily be added or changed.



Adjustment for hydraulic flow

Divide ratio of hydraulic flow can be adjusted by service factory for custom usage.



EASY MAINTENANCE



Standard FOPS overhead cab guard

The standard FOPS guard can be tilted open for easy window cleaning. Meets standard FOPS, Top Guard Level II requirements. (ISO10262)



Engine maintenance



Two-stage air filter




Urea tank

Urea filter cap is placed on the step for easy access.



Left side (radiator and cooling system elements)


Laid out for easy access to radiator and cooling system.



Right side




Fuel filter



Pre-filter with integrated water separator



Engine oil filter

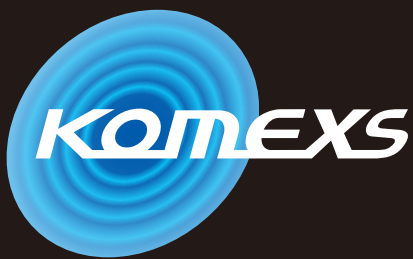

KOBELCO MONITORING EXCAVATOR SYSTEM




Remote Monitoring for Peace of Mind

KOMEXS (Kobelco Monitoring Excavator System) uses satellite communication and internet to relay data, and therefore can be deployed in areas where other forms of communication are difficult. When a hydraulic excavator is fitted with this system, data on the machine's operation, such as operating hours, location, fuel consumption, and maintenance status can be obtained remotely.


Direct Access to Operational Status

Location Data

Accurate location data can be obtained even from sites where communications are difficult.

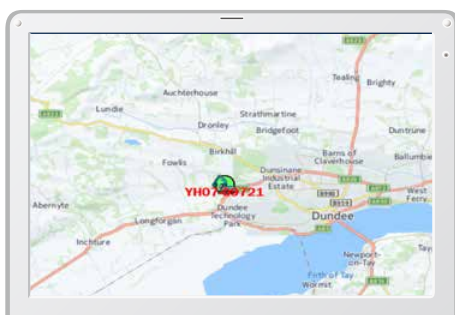

Latest location

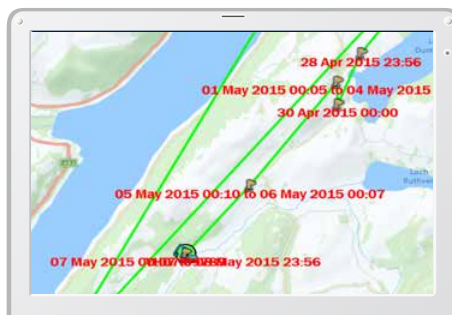


Location records

| Period | 11 Apr, 2015 | to | 10 May, 2015 | Search |
|-------------------|--------------|-------|--------------|--------|
| Type of Operation | Working Hrs | Ratio | | |
| Total Working Hrs | 169 Hrs | 100 % | | |
| Digging Hrs | 72.2 Hrs | 43 % | | |
| Traveling Hrs | 18.3 Hrs | 11 % | | |
| Idle Hrs | 15.9 Hrs | 9 % | | |
| Opt Att Hrs | 62.5 Hrs | 37 % | | |
| Crane Mode Hrs | 0 Hrs | 0 % | | |

Work data

Operating Hours

- A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable.
- Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

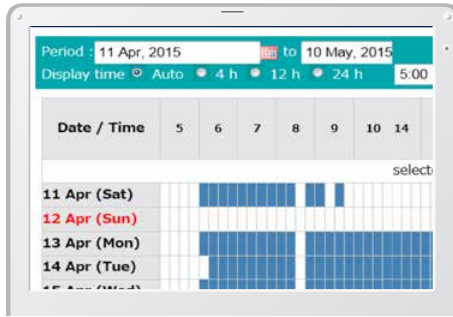

Daily report

Fuel Consumption Data


Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.

| Work mode | Working Hrs | Total Fuel Consumption |
|--------------|---------------|------------------------|
| H mode | 2:06 | 24.5 L |
| S mode | 0:00 | 0.0 L |
| E mode | 169:19 | 1489.7 L |
| TOTAL | 171:25 | 1514.2 L |

Fuel consumption

Graph of Work Content

The graph shows how working hours are divided among different operating categories, including digging, idling, travelling and optional operations.

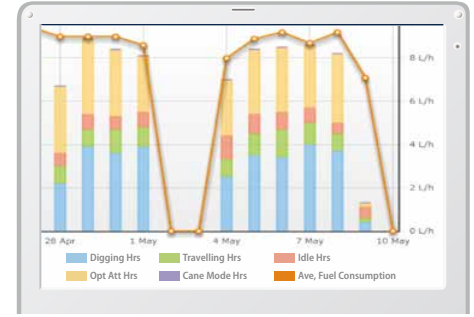

Work status

Maintenance Data and Warning Alerts

Machine Maintenance Data

- Provides maintenance status of separate machines operating at multiple sites.
- Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.

| Model | Serial No. | Hour Meter | Engine Oil |
|----------------------|------------|------------|------------|
| SK135SRLC-3/SK140SRL | YH07-09721 | 734 Hr | 434 |
| SK135SRLC-3/SK140SRL | YH07-09789 | 73 Hr | 429 |
| SK210LC-9 | YQ13-10454 | 960 Hr | 58 |
| SK210LC-9 | YQ13-10481 | 549 Hr | 498 |
| SK75SR- | YT08-30374 | | |

Maintenance

Warning Alerts

This system warns an alert if an anomaly is sensed, preventing damage that could result in machine downtime.

Alarm Information Can Be Received through E-mail

Alarm information or maintenance notice can be received through E-mail, using a computer or cell phone.



Alarm messages can be received on mobile device.

Daily/Monthly Reports

Operational data downloaded onto a computer helps in formulating daily and monthly reports.

Security System

Engine Start Alarm

The system can be set an alarm if the machine is operated outside designated time.

Engine start alarm outside prescribed work time

Area Alarm

It can be set an alarm if the machine is moved out of its designated area to another location.

Alarm for outside of reset area

Specifications



Engine

| Model | ISUZU MOTORS LIMITED 4JJ1XDDV A01 |
|--------------------|--|
| Type | Four-cycle, water-cooled, direct injection diesel engine, turbo charged, EU Stage V exhaust emission regulation |
| No. of cylinders | 4 |
| Bore and stroke | 95.4 mm × 104.9 mm |
| Displacement | 2.999 L |
| Rated power output | 71.3 kW/2,000 min ⁻¹ (ISO 9249: with fan) 78.5 kW/2,000 min ⁻¹ (ISO 14396: without fan) |
| Max. torque | 354 N-m/1,800 min ⁻¹ (ISO 9249: with fan) 375 N-m/1,800 min ⁻¹ (ISO 14396: without fan) |



Hydraulic system

| Pump | |
|----------------------|--|
| Type | Two variable displacement axial piston pumps + extra gear pump + pilot gear pump |
| Max. discharge flow | 2 × 130 L/min 1 × 60 L/min 1 × 20 L/min |
| Relief valve setting | |
| Boom, arm and bucket | 34.3 MPa |
| Travel circuit | 34.3 MPa |
| Swing circuit | 28.0 MPa |
| Control circuit | 5.0 MPa |
| Pilot control pump | Gear type |
| Main control valves | 12-spool |
| Oil cooler | Air cooled type |



Swing system

| | |
|----------------------------------|--|
| Swing motor | One fixed displacement piston motor |
| Brake | Hydraulic; locking automatically when the swing control lever is in the neutral position |
| Parking brake | Wet multiple plate |
| Swing speed | 11.0 min ⁻¹ |
| Swing torque | 40.4 kN-m |
| Maximum swing gradient (Loaded)* | 26% {15°} |

*Value for the least favourable specification



Attachments

Backhoe bucket and combination

| Use | | | Backhoe bucket | | | | | | | |
|-----------------|---------------------|----|----------------|------|------|------|-------|-------|-------|-----|
| | | | Normal digging | | | | | | | |
| Bucket capacity | ISO heaped | m³ | 0.24 | 0.31 | 0.38 | 0.45 | 0.50 | 0.57 | 0.70 | |
| | Struck | m³ | 0.20 | 0.23 | 0.28 | 0.35 | 0.38 | 0.43 | 0.50 | |
| Opening width | With side cutter | mm | 590 | 700 | 800 | 915 | 1,000 | 1,100 | — | |
| | Without side cutter | mm | 500 | 600 | 700 | 815 | 900 | 1,000 | 1,150 | |
| No. of teeth | | | 3 | 3 | 4 | 4 | 5 | 5 | 5 | |
| Bucket weight | | | kg | 280 | 300 | 340 | 360 | 380 | 400 | 410 |
| Combination | 2.38 m arm | | ○ | ○ | ○ | ○ | ◎ | △ | △ | |
| | 2.84 m arm | | ○ | ○ | ◎ | △ | × | × | × | |

◎ Standard ○ Recommended △ Loading only × Not recommended



Travel system

| | |
|--------------------|-----------------------------------|
| Travel motors | 2 × axial-piston, two-step motors |
| Travel brakes | Hydraulic brake per motor |
| Parking brakes | Oil disc brake per motor |
| Travel shoes | 46 each side |
| Travel speed | 5.6/3.4 km/h |
| Rated drawbar pull | 141 kN (SAE J 1309) |
| Gradeability | 70% {35°} |



Cab & control

| Cab | |
|---|------------------------|
| All-weather, sound-suppressed steel cab mounted on the silicon-sealed viscous mounts and equipped with a heavy, insulated floor mat | |
| Control | |
| Two hand levers and two foot pedals for travel | |
| Two hand levers for excavating and swing | |
| Electric rotary-type engine throttle | |
| Noise levels | |
| External | 101 dB(A) (2000/14/EC) |
| Operator | 70 dB(A) (ISO 6396) |
| Vibration levels | |
| Hand/arm* | ≤ 2.5 m/s ² |
| Body* | ≤ 0.5 m/s ² |

*For the risk assessment according to 2002/44/EC, refer to ISO/TR 25398: 2006



Cylinders

| | |
|-----------------|--|
| Boom cylinders | 100 mm × 1,092 mm / 100 mm × 1,038 mm* |
| Arm cylinder | 115 mm × 1,116 mm |
| Bucket cylinder | 100 mm × 903 mm |
| Jib cylinder* | 130 mm × 925 mm |
| Dozer cylinders | 125mm × 220 mm |

*for Two piece boom only



Refilling capacities & lubrications

| | |
|-----------------------|------------------------|
| Fuel tank | 280 L |
| Cooling system | 16 L |
| Engine oil | 17 L |
| Travel reduction gear | 2 × 2.1 L |
| Swing reduction gear | 1.65 L |
| Hydraulic oil tank | 96.7 L tank oil level |
| | 180 L hydraulic system |
| DEF/Urea tank | 33.9 L |



Working ranges


Unit: m

| Range | Arm | 4.68 m | |
|--|-----|--------|--------|
| | | 2.38 m | 2.84 m |
| a- Max. digging reach | | 8.34 | 8.78 |
| b- Max. digging reach at ground level | | 8.17 | 8.62 |
| c- Max. digging depth | | 5.52 | 5.98 |
| d- Max. digging height | | 8.45 | 8.75 |
| e- Max. dumping clearance | | 6.08 | 6.38 |
| f- Min. dumping clearance | | 2.28 | 1.84 |
| g- Max. vertical wall digging depth | | 4.45 | 4.91 |
| h- Min. swing radius | | 2.75 | 2.84 |
| i- Horizontal digging stroke at ground level | | 4.20 | 4.68 |
| j- Digging depth for 2.4 m (8') flat bottom | | 5.28 | 5.77 |
| Bucket capacity ISO heaped m ³ | | 0.50 | 0.38 |

Digging force (ISO 6015)

Unit: kN

| Arm length | 2.38 m | 2.84 m |
|----------------------|--------|--------|
| Bucket digging force | 105.4 | |
| Arm crowding force | 64.0 | 58.0 |

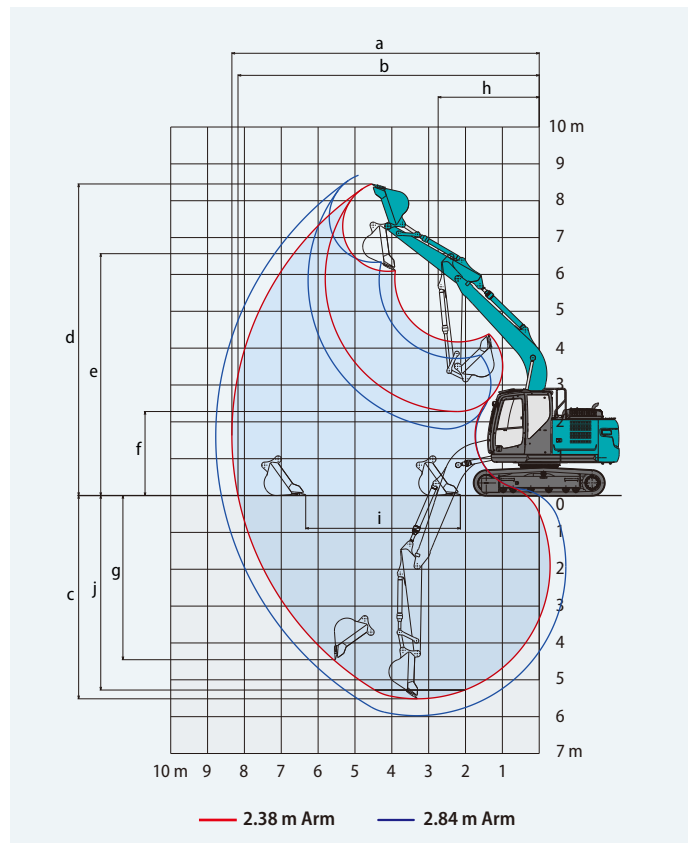


Dimensions

Unit: mm

| Arm length | 2.38 m | 2.84 m |
|-----------------------------------|---------|--------|
| A Overall length | 7,770 | 7,810 |
| B Overall height (to top of boom) | 2,770 | 3,150 |
| C Overall width | 2,590** | |
| D Overall height (to top of cab) | 2,920 | |
| E Ground clearance of rear end* | 915 | |
| F Ground clearance* | 445 | |

| | |
|--|-------|
| G Tail swing radius | 2,190 |
| G' Distance from centre of swing to rear end | 2,170 |
| H Tumbler distance | 3,040 |
| I Overall length of crawler | 3,780 |
| J Track gauge | 1,990 |
| K Shoe width | 600 |
| L Overall width of upperstructure | 2,490 |

*Without including height of shoe lug **600 mm shoe

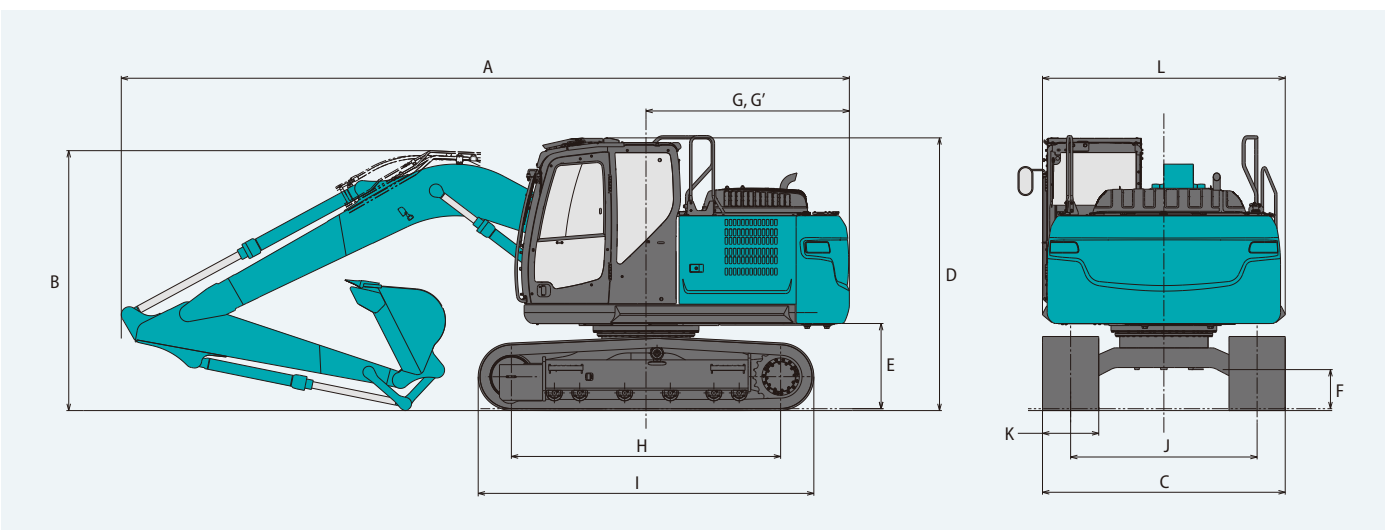

Two-piece boom specifications



Working ranges


Unit: m

| Range | Arm | Two-piece boom | |
|--|-----|----------------|--------|
| | | 2.38 m | 2.84 m |
| a- Max. digging reach | | 8.80 | 9.24 |
| b- Max. digging reach at ground level | | 8.64 | 9.09 |
| c- Max. digging depth | | 5.70 | 6.16 |
| d- Max. digging height | | 8.83 | 9.11 |
| e- Max. dumping clearance | | 6.48 | 6.76 |
| f- Min. dumping clearance | | 0.44 | 0.03 |
| g- Max. vertical wall digging depth | | 4.59 | 5.06 |
| h- Min. swing radius | | 2.94 | 2.99 |
| i- Horizontal digging stroke at ground level | | 5.70 | 6.58 |
| j- Digging depth for 2.4 m (8') flat bottom | | 5.58 | 6.04 |
| Bucket capacity ISO heaped m ³ | | 0.50 | 0.38 |

Digging force (ISO 6015)

Unit: kN

| Arm length | 2.38 m | 2.84 m |
|----------------------|--------|--------|
| Bucket digging force | 105.4 | |
| Arm crowding force | 64.0 | 58.0 |

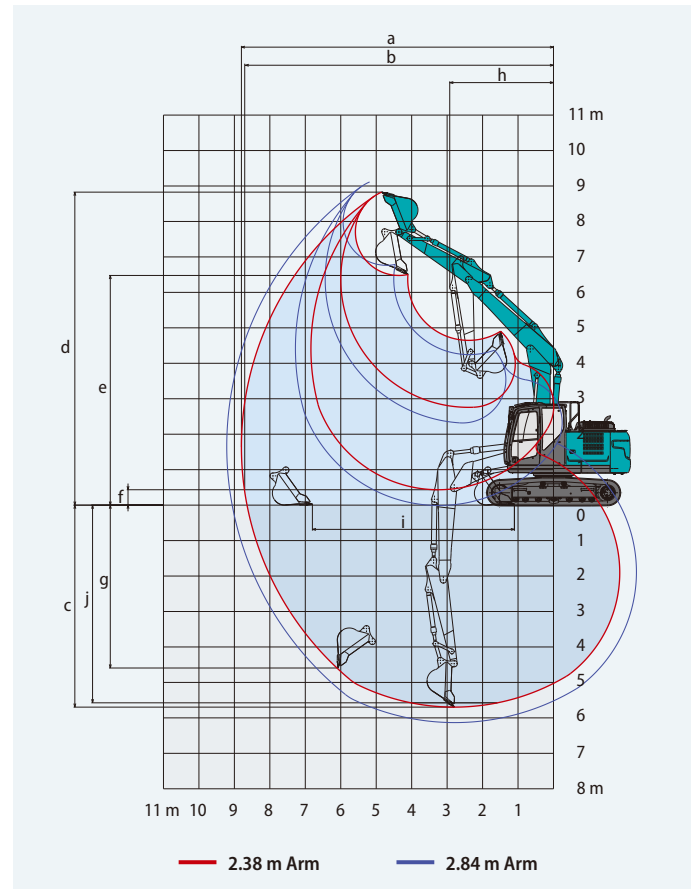


Dimensions

Unit: mm

| Arm length | 2.38 m | 2.84 m |
|--|--------|--------|
| A Overall length | 8,260 | 8,330 |
| B Overall height (to top of boom) | 2,780 | 3,100 |
| C Overall width | 2,590 | |
| D Overall height (to top of cab) | 2,920 | |
| E Ground clearance of rear end* | 915 | |
| F Ground clearance* | 410 | |
| G Tail swing radius | 2,190 | |
| G' Distance from centre of swing to rear end | 2,170 | |

| | |
|-----------------------------------|---------|
| H Tumbler distance | 3,040 |
| I Overall length of crawler | 3,780 |
| J Track gauge | 1,990 |
| K Shoe width | 600 |
| L Overall width of upperstructure | 2,490 |
| M Dozer blade (up/down) | 515/575 |

*Without including height of shoe lug **600 mm shoe

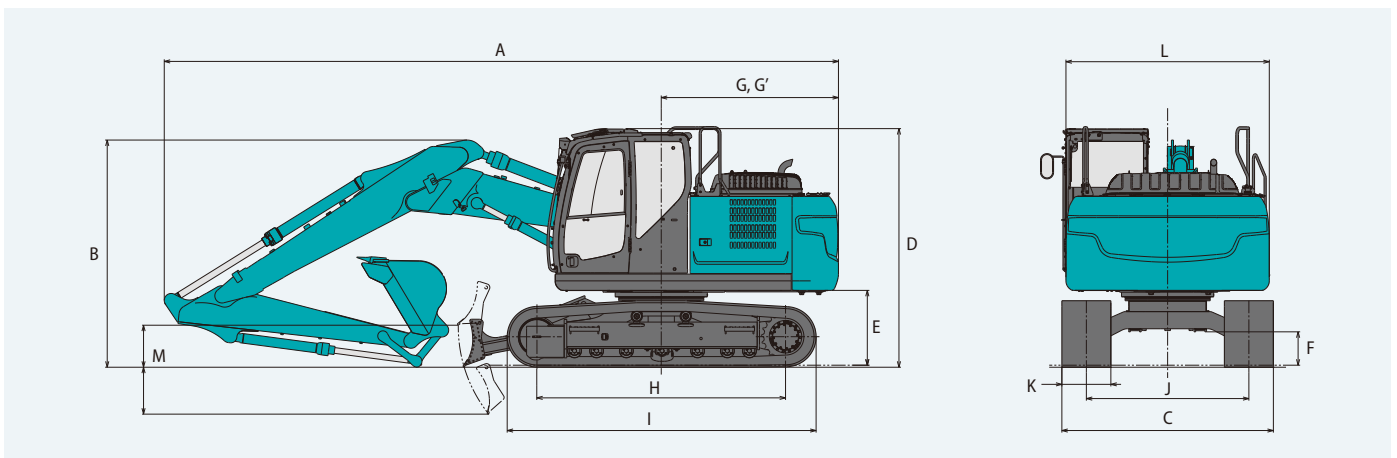

Operating weight & ground pressure

SK130_{LC}

SK130LC-11

Standard boom

Boom: 4.68 m Arm: 2.38 m Bucket: 0.5 m³ ISO heaped bucket Dozer: without

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|------------------|------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Counterweight | standard | | | | | | |
| Ground pressure (kPa) | 43.0 | 36.4 | 31.7 | 28.2 | 31.0 | 42.3 | 43.1 |
| Operating weight (kg) | 14,400 | 14,700 | 14,900 | 15,100 | 14,600 | 14,300 | 14,600 |

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|------------------|------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Counterweight | + 600 kg | | | | | | |
| Ground pressure (kPa) | 44.7 | 37.9 | 33.0 | 29.3 | 32.2 | 44.1 | 44.8 |
| Operating weight (kg) | 15,000 | 15,300 | 15,500 | 15,700 | 15,200 | 14,900 | 15,200 |

Boom: 4.68 m Arm: 2.38 m Bucket: 0.5 m³ ISO heaped bucket Dozer: with

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|------------------|------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Dozer (mm) | 2,490 | 2,590 | 2,690 | 2,690 | 2,690 | 2,490 | 2,490 |
| Counterweight | standard | | | | | | |
| Ground pressure (kPa) | 45.3 | 38.4 | 33.5 | 32.7 | 44.7 | | 45.4 |
| Operating weight (kg) | 15,200 | 15,500 | 15,750 | 15,400 | 15,100 | | 15,400 |

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|------------------|------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Dozer (mm) | 2,490 | 2,590 | 2,690 | 2,690 | 2,690 | 2,490 | 2,490 |
| Counterweight | + 600 kg | | | | | | |
| Ground pressure (kPa) | 47.1 | 39.9 | 34.7 | 33.9 | 46.4 | | 47.2 |
| Operating weight (kg) | 15,800 | 16,100 | 16,350 | 16,000 | 15,700 | | 16,000 |

Boom: 4.68 m Arm: 2.84 m Bucket: 0.38 m³ ISO heaped bucket Dozer: without

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|------------------|------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Counterweight | standard | | | | | | |
| Ground pressure (kPa) | 43.0 | 36.4 | 31.7 | 28.2 | 31.0 | 42.3 | 43.1 |
| Operating weight (kg) | 14,500 | 14,700 | 14,900 | 15,200 | 14,600 | 14,300 | 14,600 |

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|------------------|------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Counterweight | + 600 kg | | | | | | |
| Ground pressure (kPa) | 44.8 | 37.9 | 33.0 | 29.3 | 32.2 | 44.1 | 44.9 |
| Operating weight (kg) | 15,100 | 15,300 | 15,500 | 15,800 | 15,200 | 14,900 | 15,200 |

Boom: 4.68 m Arm: 2.84 m Bucket: 0.38 m³ ISO heaped bucket Dozer: with

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|------------------|------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Dozer (mm) | 2,490 | 2,590 | 2,690 | 2,690 | 2,690 | 2,490 | 2,490 |
| Counterweight | standard | | | | | | |
| Ground pressure (kPa) | 45.4 | 38.5 | 33.5 | 32.7 | 44.7 | | 45.5 |
| Operating weight (kg) | 15,300 | 15,500 | 15,800 | 15,400 | 15,100 | | 15,400 |

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|------------------|------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Dozer (mm) | 2,490 | 2,590 | 2,690 | 2,690 | 2,690 | 2,490 | 2,490 |
| Counterweight | + 600 kg | | | | | | |
| Ground pressure (kPa) | 47.2 | 39.9 | 34.8 | 34.0 | 46.5 | | 47.2 |
| Operating weight (kg) | 15,900 | 16,100 | 16,400 | 16,000 | 15,700 | | 16,000 |

Operating weight & ground pressure

Two-piece boom

Boom: Two-piece Arm: 2.38 m Bucket: 0.5 m³ ISO heaped bucket Dozer: without

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|---------------------|---------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Counterweight | standard | | | | | | |
| Ground pressure (kPa) | 45.0 | 38.2 | 33.2 | 29.5 | 32.5 | 44.4 | 45.1 |
| Operating weight (kg) | 15,100 | 15,400 | 15,600 | 15,900 | 15,300 | 15,000 | 15,300 |

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|---------------------|---------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Counterweight | + 600 kg | | | | | | |
| Ground pressure (kPa) | 46.8 | 39.6 | 34.5 | 30.6 | 33.7 | 46.1 | 46.9 |
| Operating weight (kg) | 15,700 | 16,000 | 16,200 | 16,500 | 15,900 | 15,600 | 15,900 |

Boom: Two-piece Arm: 2.38 m Bucket: 0.5 m³ ISO heaped bucket Dozer: with

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--|---------------------------------------|---------------------|---------------------|
| Shoes (mm) | 500 | 600 | 700 | | 700 | 500 | 500 |
| Dozer (mm) | 2,490 | 2,590 | 2,690 | | 2,690 | 2,490 | 2,490 |
| Counterweight | standard | | | | | | |
| Ground pressure (kPa) | 47.4 | 40.2 | 35.0 | | 34.2 | 46.7 | 47.5 |
| Operating weight (kg) | 15,900 | 16,200 | 16,500 | | 16,100 | 15,800 | 16,100 |

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--|---------------------------------------|---------------------|---------------------|
| Shoes (mm) | 500 | 600 | 700 | | 700 | 500 | 500 |
| Dozer (mm) | 2,490 | 2,590 | 2,690 | | 2,690 | 2,490 | 2,490 |
| Counterweight | + 600 kg | | | | | | |
| Ground pressure (kPa) | 49.2 | 41.7 | 36.2 | | 35.5 | 48.5 | 49.3 |
| Operating weight (kg) | 16,500 | 16,800 | 17,100 | | 16,700 | 16,400 | 16,700 |

Boom: Two-piece Arm: 2.84 m Bucket: 0.38 m³ ISO heaped bucket Dozer: without

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|---------------------|---------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Counterweight | standard | | | | | | |
| Ground pressure (kPa) | 45.0 | 38.1 | 33.2 | 29.5 | 32.5 | 44.4 | 45.1 |
| Operating weight (kg) | 15,100 | 15,400 | 15,600 | 15,900 | 15,300 | 15,000 | 15,300 |

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--------|---------------------------------------|---------------------|---------------------|
| Shoes (mm) | 500 | 600 | 700 | 800 | 700 | 500 | 500 |
| Counterweight | + 600 kg | | | | | | |
| Ground pressure (kPa) | 46.8 | 39.6 | 34.5 | 30.6 | 33.7 | 46.1 | 46.9 |
| Operating weight (kg) | 15,700 | 16,000 | 16,200 | 16,500 | 15,800 | 15,600 | 15,900 |

Boom: Two-piece Arm: 2.84 m Bucket: 0.38 m³ ISO heaped bucket Dozer: with


| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--|---------------------------------------|---------------------|---------------------|
| Shoes (mm) | 500 | 600 | 700 | | 700 | 500 | 500 |
| Dozer (mm) | 2,490 | 2,590 | 2,690 | | 2,690 | 2,490 | 2,490 |
| Counterweight | standard | | | | | | |
| Ground pressure (kPa) | 47.4 | 40.2 | 34.9 | | 34.2 | 46.7 | 47.5 |
| Operating weight (kg) | 15,900 | 16,200 | 16,400 | | 16,100 | 15,800 | 16,100 |

| | HD shoes | | | | Triple grouser shoes (even height) | BS Geogrip shoes | Rubber pad shoes |
|-----------------------|----------|--------|--------|--|---------------------------------------|---------------------|---------------------|
| Shoes (mm) | 500 | 600 | 700 | | 700 | 500 | 500 |
| Dozer (mm) | 2,490 | 2,590 | 2,690 | | 2,690 | 2,490 | 2,490 |
| Counterweight | + 600 kg | | | | | | |
| Ground pressure (kPa) | 49.2 | 41.6 | 36.2 | | 35.5 | 48.5 | 49.3 |
| Operating weight (kg) | 16,500 | 16,800 | 17,000 | | 16,700 | 16,400 | 16,700 |

Lift capacities

SK130LC

SK130LC-11



Rating over front



Rating over side or 360 degrees

A - Reach from swing centerline to arm top

B - Arm top height above/below ground













C - Lift point











Relief valve setting: 34.3 MPa

| SK130LC | | Boom: 4.68 m | | Arm: 2.84 m | | Bucket: without | | Counterweight: 2,400 kg | | Shoe: 600 mm | | Dozer: without | | | | |
|---------|----|--------------|--------|-------------|--------|-----------------|-------|-------------------------|--------|--------------|-------|----------------|--|--------|--------|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius | | |
| | | | | | | | | | | | | | | | | |
| 7.5 m | kg | | | | | | | | | | | | | *2,030 | *2,030 | 4.64 m |
| 6.0 m | kg | | | | | | | *2,110 | *2,110 | | | | | *1,700 | *1,700 | 6.13 m |
| 4.5 m | kg | | | | | | | *2,970 | 2,500 | | | | | *1,590 | *1,590 | 6.98 m |
| 3.0 m | kg | | | *5,270 | *5,270 | *3,860 | 3,730 | *3,330 | 2,400 | | | | | *1,580 | *1,580 | 7.43 m |
| 1.5 m | kg | | | *7,870 | 6,190 | *4,940 | 3,440 | *3,670 | 2,270 | *1,960 | 1,610 | | | *1,670 | 1,590 | 7.55 m |
| G.L. | kg | | | *6,410 | 5,820 | 5,480 | 3,230 | 3,550 | 2,160 | | | | | *1,850 | 1,620 | 7.36 m |
| −1.5 m | kg | *4,660 | *4,660 | *8,910 | 5,770 | 5,380 | 3,140 | 3,500 | 2,120 | | | | | *2,220 | 1,790 | 6.83 m |
| −3.0 m | kg | *7,800 | *7,800 | *8,350 | 5,870 | 5,420 | 3,180 | | | | | | | *3,070 | 2,230 | 5.87 m |
| −4.5 m | kg | | | *5,920 | *5,920 | | | | | | | | | *3,960 | 3,760 | 4.17 m |











| SK130LC | | Boom: 4.68 m | | Arm: 2.84 m | | Bucket: without | | Counterweight: 2,400 kg + 600 kg | | Shoe: 600 mm | | Dozer: without | | | | |
|---------|----|--------------|--------|-------------|--------|-----------------|--------|----------------------------------|--------|--------------|-------|----------------|--|--------|--------|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius | | |
| | | | | | | | | | | | | | | | | |
| 7.5 m | kg | | | | | | | | | | | | | *2,030 | *2,030 | 4.64 m |
| 6.0 m | kg | | | | | | | *2,110 | *2,110 | | | | | *1,700 | *1,700 | 6.13 m |
| 4.5 m | kg | | | | | | | *2,970 | 2,770 | | | | | *1,590 | *1,590 | 6.98 m |
| 3.0 m | kg | | | *5,270 | *5,270 | *3,860 | *3,860 | *3,330 | 2,660 | | | | | *1,580 | *1,580 | 7.43 m |
| 1.5 m | kg | | | *7,870 | 6,870 | *4,940 | 3,820 | *3,820 | 2,540 | *1,960 | 1,820 | | | *1,670 | *1,670 | 7.55 m |
| G.L. | kg | | | *6,410 | *6,410 | *5,730 | 3,610 | 3,890 | 2,430 | | | | | *1,850 | 1,830 | 7.36 m |
| −1.5 m | kg | *4,660 | *4,660 | *8,910 | 6,450 | 5,900 | 3,530 | 3,840 | 2,390 | | | | | *2,220 | 2,020 | 6.83 m |
| −3.0 m | kg | *7,800 | *7,800 | *8,350 | 6,550 | *5,560 | 3,560 | | | | | | | *3,070 | 2,510 | 5.87 m |
| −4.5 m | ka | | | *5,920 | *5,920 | | | | | | | | | *3,960 | *3,960 | 4.17 m |











| SK130LC | | Boom: 4.68 m | | Arm: 2.84 m | | Bucket: without | | Counterweight: 2,400 kg | | Shoe: 600 mm | | Dozer: blade up | | | | |
|---------|----|--------------|--------|-------------|--------|-----------------|--------|-------------------------|--------|--------------|--------|-----------------|--|--------|--------|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius | | |
| | | | | | | | | | | | | | | | | |
| 7.5 m | kg | | | | | | | | | | | | | *2,030 | *2,030 | 4.64 m |
| 6.0 m | kg | | | | | | | | *2,110 | *2,110 | | | | *1,700 | *1,700 | 6.13 m |
| 4.5 m | kg | | | | | | | | *2,970 | 2,630 | | | | *1,590 | *1,590 | 6.98 m |
| 3.0 m | kg | | | | *5,270 | *5,270 | *3,860 | *3,860 | *3,330 | 2,530 | | | | *1,580 | *1,580 | 7.43 m |
| 1.5 m | kg | | | | *7,870 | 6,520 | *4,940 | 3,620 | 3,660 | 2,400 | *1,960 | 1,710 | | *1,670 | *1,670 | 7.55 m |
| G.L. | kg | | | | *6,410 | 6,150 | 5,470 | 3,410 | 3,550 | 2,290 | | | | *1,850 | 1,720 | 7.36 m |
| −1.5 m | kg | *4,660 | *4,660 | *8,910 | 6,090 | 5,370 | 3,330 | 3,490 | 2,250 | | | | | *2,220 | 1,900 | 6.83 m |
| −3.0 m | kg | *7,800 | *7,800 | *8,350 | 6,190 | 5,410 | 3,360 | | | | | | | *3,070 | 2,360 | 5.87 m |
| −4.5 m | kg | | | | *5,920 | *5,920 | | | | | | | | *3,960 | *3,960 | 4.17 m |











| SK130LC | | Boom: 4.68 m Arm: 2.84 m Bucket: without Counterweight: 2,400 kg + 600 kg Shoe: 600 mm Dozer: blade up | | | | | | | | | | | | | |
|---------|---|--|---|---|---|---|---|---|---|---|---|---|--------|--------|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius | |
| |  |  |  |  |  |  |  |  |  |  |  |  | | | |
| 7.5 m | kg | | | | | | | | | | | | | | |
| 6.0 m | kg | | | | | | | *2,110 | *2,110 | | | | *2,030 | *2,030 | 4.64 m |
| 4.5 m | kg | | | | | | | *2,970 | 2,890 | | | | *1,590 | *1,590 | 6.13 m |
| 3.0 m | kg | | | | | | | *2,970 | 2,890 | | | | *1,590 | *1,590 | 6.98 m |
| 3.0 m | kg | | | | | | | *3,330 | 2,790 | | | | *1,580 | *1,580 | 6.98 m |
| 1.5 m | kg | | | | | | | *3,330 | 2,790 | | | | *1,580 | *1,580 | 7.43 m |
| 1.5 m | kg | | | | | | | *3,820 | 2,660 | | | | *1,670 | *1,670 | 7.55 m |
| G.L. | kg | | | | | | | 3,890 | 2,560 | | | | *1,850 | *1,850 | 7.36 m |
| –1.5 m | kg | | | | | | | 3,840 | 2,510 | | | | *2,220 | 2,120 | 6.83 m |
| –3.0 m | kg | | | | | | | | | | | | *3,070 | 2,640 | 5.87 m |
| –4.5 m | kg | | | | | | | | | | | | *3,960 | *3,960 | 4.17 m |













| SK130LC | | Boom: 4.68 m | | Arm: 2.38 m | | Bucket: without | | Counterweight: 2,400 kg | | Shoe: 600 mm | | Dozer: without | | | |
|---------|----|---|---|---|---|---|---|---|---|---|---|----------------|--------|--------|--|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | At max. reach | | | | Radius | |
| | |  |  |  |  |  |  |  |  |  |  | | | | |
| 6.0 m | kg | | | | | | | | | | | *1,800 | *1,800 | 5.57 m | |
| 4.5 m | kg | | | | | | | *3,400 | *3,400 | *3,300 | 2,470 | *1,670 | *1,670 | 6.50 m | |
| 3.0 m | kg | | | *6,260 | *6,260 | *4,280 | 3,670 | *3,600 | 2,380 | *1,670 | *1,670 | *1,670 | *1,670 | 6.98 m | |
| 1.5 m | kg | | | *5,420 | *5,420 | *5,290 | 3,400 | 3,660 | 2,270 | *1,760 | *1,760 | *1,760 | *1,760 | 7.11 m | |
| G.L. | kg | | | *6,260 | 5,830 | 5,480 | 3,230 | 3,570 | 2,180 | *1,990 | 1,800 | *1,990 | 1,800 | 6.91 m | |
| −1.5 m | kg | *5,440 | *5,440 | *9,080 | 5,850 | 5,430 | 3,190 | 3,550 | 2,160 | *2,460 | 2,020 | *2,460 | 2,020 | 6.34 m | |
| −3.0 m | kg | *9,280 | *9,280 | *7,820 | 5,990 | *5,270 | 3,260 | | | *3,670 | 2,640 | *3,670 | 2,640 | 5.28 m | |













Lift capacities


| SK130LC | | Boom: 4.68 m | Arm: 2.38 m | Bucket: without | | Counterweight: 2,400 kg + 600 kg | | Shoe: 600 mm | Dozer: without | | | |
|---------|----|---|---|---|---|---|---|---|---|---|---|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  | |
| 6.0 m | kg | | | | | | | | | *1,800 | *1,800 | 5.57 m |
| 4.5 m | kg | | | | | *3,400 | *3,400 | *3,300 | 2,740 | *1,670 | *1,670 | 6.50 m |
| 3.0 m | kg | | | *6,260 | *6,260 | *4,280 | 4,060 | *3,600 | 2,650 | *1,670 | *1,670 | 6.98 m |
| 1.5 m | kg | | | *5,420 | *5,420 | *5,290 | 3,790 | 4,010 | 2,540 | *1,760 | *1,760 | 7.11 m |
| G.L. | kg | | | *6,260 | *6,260 | *5,920 | 3,620 | 3,910 | 2,450 | *1,990 | *1,990 | 6.91 m |
| -1.5 m | kg | *5,440 | *5,440 | *9,080 | 6,530 | 5,940 | 3,570 | 3,890 | 2,430 | *2,460 | 2,270 | 6.34 m |
| -3.0 m | kg | *9,280 | *9,280 | *7,820 | 6,670 | *5,270 | 3,640 | | | *3,670 | 2,950 | 5.28 m |

| SK130LC | | Boom: 4.68 m | Arm: 2.38 m | Bucket: without | | Counterweight: 2,400 kg | | Shoe: 600 mm | Dozer: blade up | | | |
|---------|----|---|---|---|---|---|---|---|---|---|---|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  | |
| 6.0 m | kg | | | | | | | | | *1,800 | *1,800 | 5.57 m |
| 4.5 m | kg | | | | | *3,400 | *3,400 | *3,300 | 2,600 | *1,670 | *1,670 | 6.50 m |
| 3.0 m | kg | | | *6,260 | *6,260 | *4,280 | 3,860 | *3,600 | 2,510 | *1,670 | *1,670 | 6.98 m |
| 1.5 m | kg | | | *5,420 | *5,420 | *5,290 | 3,590 | 3,660 | 2,400 | *1,760 | *1,760 | 7.11 m |
| G.L. | kg | | | *6,260 | 6,150 | *5,470 | 3,420 | 3,560 | 2,310 | *1,990 | 1,910 | 6.91 m |
| -1.5 m | kg | *5,440 | *5,440 | *9,080 | 6,170 | 5,410 | 3,370 | 3,540 | 2,290 | *2,460 | 2,140 | 6.34 m |
| -3.0 m | kg | *9,280 | *9,280 | *7,820 | 6,320 | *5,270 | 3,440 | | | *3,670 | 2,790 | 5.28 m |

| SK130LC | | Boom: 4.68 m | Arm: 2.38 m | Bucket: without | | Counterweight: 2,400 kg + 600 kg | | Shoe: 600 mm | Dozer: blade up | | | |
|---------|----|---|---|---|---|---|---|---|---|---|---|--------|
| B | A | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  | |
| 6.0 m | kg | | | | | | | | | *1,800 | *1,800 | 5.57 m |
| 4.5 m | kg | | | | | *3,400 | *3,400 | *3,300 | 2,860 | *1,670 | *1,670 | 6.50 m |
| 3.0 m | kg | | | *6,260 | *6,260 | *4,280 | 4,240 | *3,600 | 2,780 | *1,670 | *1,670 | 6.98 m |
| 1.5 m | kg | | | *5,420 | *5,420 | *5,290 | 3,970 | 4,000 | 2,660 | *1,760 | *1,760 | 7.11 m |
| G.L. | kg | | | *6,260 | *6,260 | *5,920 | 3,800 | 3,900 | 2,580 | *1,990 | *1,990 | 6.91 m |
| -1.5 m | kg | *5,440 | *5,440 | *9,080 | 6,850 | 5,930 | 3,750 | 3,880 | 2,560 | *2,460 | 2,390 | 6.34 m |
| -3.0 m | kg | *9,280 | *9,280 | *7,820 | 7,000 | *5,270 | 3,820 | | | *3,670 | 3,100 | 5.28 m |

| SK130LC | | 2 piece boom | | Arm: 2.84 m | Bucket: without | | Counterweight: 2,400 kg | | Shoe: 600 mm | Dozer: without | | | | |
|---------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
| A \ B | | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  |  |  | |
| 7.5 m | kg | | | | | | | | | | | *1,910 | *1,910 | 5.37 m |
| 6.0 m | kg | | | | | | | *2,750 | 2,560 | | | *1,690 | *1,690 | 6.69 m |
| 4.5 m | kg | | | | | | | *3,190 | 2,490 | | | *1,620 | *1,620 | 7.47 m |
| 3.0 m | kg | | | *6,840 | 6,710 | *4,460 | 3,620 | *2,650 | 2,320 | 2,620 | 1,590 | *1,640 | 1,440 | 7.89 m |
| 1.5 m | kg | *19,640 | *19,640 | *8,510 | 5,730 | *5,240 | 3,210 | 3,570 | 2,130 | 2,530 | 1,510 | *1,740 | 1,340 | 8.01 m |
| G.L. | kg | *14,980 | *14,980 | *4,280 | *4,280 | *5,230 | 2,950 | 3,410 | 1,990 | 2,460 | 1,440 | *1,940 | 1,340 | 7.83 m |
| −1.5 m | kg | *3,960 | *3,960 | *6,680 | 5,240 | 5,110 | 2,840 | 3,320 | 1,910 | | | *2,310 | 1,460 | 7.34 m |
| −3.0 m | kg | | | *6,730 | 5,350 | *4,790 | 2,860 | 3,350 | 1,930 | | | *2,970 | 1,760 | 6.45 m |
| −4.5 m | kg | *13,800 | *13,800 | *6,600 | 5,760 | *3,070 | 3,040 | | | | | *2,550 | *2,550 | 4.97 m |

| SK130LC | | 2 piece boom | | Arm: 2.84 m | Bucket: without | | Counterweight: 2,400 kg + 600 kg | | Shoe: 600 mm | Dozer: without | | | | |
|---------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
| A B | | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  |  |  | |
| 7.5 m | kg | | | | | | | | | | | *1,910 | *1,910 | 5.37 m |
| 6.0 m | kg | | | | | | | *2,750 | *2,750 | | | *1,690 | *1,690 | 6.69 m |
| 4.5 m | kg | | | | | | | *3,190 | 2,750 | | | *1,620 | *1,620 | 7.47 m |
| 3.0 m | kg | | | *6,840 | *6,840 | *4,460 | 4,010 | *2,650 | 2,590 | 2,880 | 1,790 | *1,640 | 1,630 | 7.89 m |
| 1.5 m | kg | *19,640 | *19,640 | *8,510 | 6,410 | *5,240 | 3,600 | *3,880 | 2,400 | 2,790 | 1,710 | *1,740 | 1,530 | 8.01 m |
| G.L. | kg | *14,980 | *14,980 | *4,280 | *4,280 | *5,620 | 3,330 | 3,750 | 2,250 | 2,710 | 1,640 | *1,940 | 1,540 | 7.83 m |
| −1.5 m | kg | *3,960 | *3,960 | *6,680 | 5,920 | *5,490 | 3,220 | 3,670 | 2,180 | | | *2,310 | 1,670 | 7.34 m |
| −3.0 m | kg | | | *6,730 | 6,030 | *4,790 | 3,250 | *3,410 | 2,200 | | | *2,970 | 2,010 | 6.45 m |
| −4.5 m | kg | *13,800 | *13,800 | *6,600 | 6,440 | *3,070 | *3,070 | | | | | *2,550 | *2,550 | 4.97 m |



Rating over front















Rating over side or 360 degrees













A - Reach from swing centerline to arm top













B - Arm top height above/below ground













C - Lift point













Relief valve setting: 34.3 MPa













| SK130LC | | 2 piece boom | | Arm: 2.84 m | | Bucket: without | | Counterweight: 2,400 kg | | Shoe: 600 mm | | Dozer: blade up | | | | |
|-------------------------------------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|--------|--------|
| <div><div>A</div><div>B</div></div> | | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius | | |
| | |  |  |  |  |  |  |  |  |  |  |  |  | | | |
| 7.5 m | kg | | | | | | | | | | | | | *1,910 | *1,910 | 5.37 m |
| 6.0 m | kg | | | | | | | | *2,750 | 2,690 | | | | *1,690 | *1,690 | 6.69 m |
| 4.5 m | kg | | | | | | | | *3,190 | 2,610 | | | | *1,620 | *1,620 | 7.47 m |
| 3.0 m | kg | | | | | | | | *2,650 | 2,450 | 2,620 | 1,690 | | *1,640 | 1,530 | 7.89 m |
| 1.5 m | kg | | | | | | | | *2,650 | 2,450 | 2,620 | 1,690 | | *1,640 | 1,530 | 7.89 m |
| 1.5 m | kg | *19,640 | *19,640 | *8,510 | 6,060 | *5,240 | 3,400 | 3,560 | 2,260 | 2,530 | 1,600 | *1,740 | 1,430 | *1,740 | 1,430 | 8.01 m |
| G.L. | kg | *14,980 | *14,980 | *4,280 | *4,280 | 5,220 | 3,130 | 3,400 | 2,110 | 2,450 | 1,530 | *1,940 | 1,440 | *1,940 | 1,440 | 7.83 m |
| −1.5 m | kg | *3,960 | *3,960 | *6,680 | 5,560 | 5,100 | 3,020 | 3,320 | 2,040 | | | *2,310 | 1,560 | *2,310 | 1,560 | 7.34 m |
| −3.0 m | kg | | | *6,730 | 5,680 | *4,790 | 3,050 | 3,340 | 2,060 | | | *2,970 | 1,880 | *2,970 | 1,880 | 6.45 m |
| −4.5 m | kg | *13,800 | *13,800 | *6,600 | 6,080 | *3,070 | *3,070 | | | | | *2,550 | *2,550 | *2,550 | *2,550 | 4.97 m |

| SK130LC | | 2 piece boom | | Arm: 2.84 m | Bucket: without | | Counterweight: 2,400 kg + 600 kg | | Shoe: 600 mm | | Dozer: blade up | | | |
|---------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
| A | B | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  |  |  | |
| 7.5 m | kg | | | | | | | | | | | *1,910 | *1,910 | 5.37 m |
| 6.0 m | kg | | | | | | | *2,750 | *2,750 | | | *1,690 | *1,690 | 6.69 m |
| 4.5 m | kg | | | | | | | *3,190 | 2,880 | | | *1,620 | *1,620 | 7.47 m |
| 3.0 m | kg | | | *6,840 | *6,840 | *4,460 | 4,190 | *2,650 | *2,650 | 2,870 | 1,890 | *1,640 | *1,640 | 7.89 m |
| 1.5 m | kg | *19,640 | *19,640 | *8,510 | 6,740 | *5,240 | 3,780 | *3,880 | 2,530 | 2,780 | 1,810 | *1,740 | 1,620 | 8.01 m |
| G.L. | kg | *14,980 | *14,980 | *4,280 | *4,280 | *5,620 | 3,510 | 3,740 | 2,380 | 2,710 | 1,740 | *1,940 | 1,630 | 7.83 m |
| −1.5 m | kg | *3,960 | *3,960 | *6,680 | 6,240 | *5,490 | 3,410 | 3,660 | 2,300 | | | *2,310 | 1,770 | 7.34 m |
| −3.0 m | kg | | | *6,730 | 6,360 | *4,790 | 3,430 | *3,410 | 2,320 | | | *2,970 | 2,120 | 6.45 m |
| −4.5 m | kg | *13,800 | *13,800 | *6,600 | *6,600 | *3,070 | *3,070 | | | | | *2,550 | *2,550 | 4.97 m |

| SK130LC | | 2 piece boom | | Arm: 2.38 m | Bucket: without | | Counterweight: 2,400 kg | | Shoe: 600 mm | | Dozer: without | | | |
|------------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
| A B | | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  |  |  | |
| 7.5 m | kg | | | | | *2,590 | *2,590 | | | | | *2,070 | *2,070 | 4.67 m |
| 6.0 m | kg | | | | | | | *2,370 | *2,370 | | | *1,790 | *1,790 | 6.15 m |
| 4.5 m | kg | | | | | *4,010 | 3,910 | *2,960 | 2,440 | | | *1,710 | *1,710 | 7.00 m |
| 3.0 m | kg | | | *7,610 | 6,360 | *4,780 | 3,530 | *3,100 | 2,290 | | | *1,740 | 1,590 | 7.45 m |
| 1.5 m | kg | | | *8,870 | 5,600 | *5,470 | 3,160 | *3,550 | 2,120 | *2,340 | 1,510 | *1,860 | 1,480 | 7.57 m |
| G.L. | kg | *15,000 | *15,000 | *3,990 | *3,990 | 5,220 | 2,940 | 3,410 | 1,990 | | | *2,100 | 1,490 | 7.38 m |
| −1.5 m | kg | | | *7,360 | 5,340 | 5,150 | 2,880 | 3,360 | 1,950 | | | *2,570 | 1,640 | 6.85 m |
| −3.0 m | kg | | | *6,040 | 5,490 | *4,470 | 2,940 | | | | | *3,100 | 2,050 | 5.90 m |

| SK130LC | | 2 piece boom | | Arm: 2.38 m | | Bucket: without | | Counterweight: 2,400 kg + 600 kg | | Shoe: 600 mm | | Dozer: without | | |
|------------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
| A B | | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  |  |  | |
| 7.5 m | kg | | | | | *2,590 | *2,590 | | | | | *2,070 | *2,070 | 4.67 m |
| 6.0 m | kg | | | | | | | *2,370 | *2,370 | | | *1,790 | *1,790 | 6.15 m |
| 4.5 m | kg | | | | | *4,010 | *4,010 | *2,960 | 2,710 | | | *1,710 | *1,710 | 7.00 m |
| 3.0 m | kg | | | *7,610 | 7,040 | *4,780 | 3,910 | *3,100 | 2,560 | | | *1,740 | *1,740 | 7.45 m |
| 1.5 m | kg | | | *8,870 | 6,280 | *5,470 | 3,540 | *3,550 | 2,390 | *2,340 | 1,710 | *1,860 | 1,680 | 7.57 m |
| G.L. | kg | *15,000 | *15,000 | *3,990 | *3,990 | *5,690 | 3,320 | 3,750 | 2,260 | | | *2,100 | 1,700 | 7.38 m |
| −1.5 m | kg | | | *7,360 | 6,020 | *5,390 | 3,260 | 3,700 | 2,210 | | | *2,570 | 1,860 | 6.85 m |
| −3.0 m | kg | | | *6,040 | *6,040 | *4,470 | 3,320 | | | | | *3,100 | 2,330 | 5.90 m |

| SK130LC | | 2 piece boom | | Arm: 2.38 m | | Bucket: without | | Counterweight: 2,400 kg | | Shoe: 600 mm | | Dozer: blade up | | |
|------------|----|---|---|---|---|---|---|---|---|---|---|---|---|--------|
| A B | | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | | Radius |
| | |  |  |  |  |  |  |  |  |  |  |  |  | |
| 7.5 m | kg | | | | | *2,590 | *2,590 | | | | | *2,070 | *2,070 | 4.67 m |
| 6.0 m | kg | | | | | | | *2,370 | *2,370 | | | *1,790 | *1,790 | 6.15 m |
| 4.5 m | kg | | | | | *4,010 | *4,010 | *2,960 | 2,570 | | | *1,710 | *1,710 | 7.00 m |
| 3.0 m | kg | | | *7,610 | 6,690 | *4,780 | 3,710 | *3,100 | 2,420 | | | *1,740 | 1,680 | 7.45 m |
| 1.5 m | kg | | | *8,870 | 5,920 | 5,460 | 3,340 | 3,540 | 2,250 | *2,340 | 1,600 | *1,860 | 1,580 | 7.57 m |
| G.L. | kg | *15,000 | *15,000 | *3,990 | *3,990 | 5,210 | 3,120 | 3,400 | 2,120 | | | *2,100 | 1,590 | 7.38 m |
| −1.5 m | kg | | | *7,360 | 5,660 | 5,140 | 3,060 | 3,350 | 2,070 | | | *2,570 | 1,750 | 6.85 m |
| −3.0 m | kg | | | *6,040 | 5,810 | *4,470 | 3,120 | | | | | *3,100 | 2,180 | 5.90 m |

| SK130LC | | 2 Piece Boom | | Arm: 2.38 m | | Bucket: without | | Counterweight: 2,400 kg + 600 kg | | Shoe: 600 mm | | Dozer: blade up | |
|---------|----|---|---|---|---|---|---|---|--|---|---|---|---|
| A | B | 1.5 m | | 3.0 m | | 4.5 m | | 6.0 m | | 7.5 m | | At max. reach | |
| | |  |  |  |  |  |  |  |  |  |  |  |  |
| 7.5 m | kg | | | | | *2,590 | *2,590 | | | | | *2,070 | *2,070 |
| 6.0 m | kg | | | | | | | *2,370 | *2,370 | | | *1,790 | *1,790 |
| 4.5 m | kg | | | | | *4,010 | *4,010 | *2,960 | 2,840 | | | *1,710 | *1,710 |
| 3.0 m | kg | | | *7,610 | 7,370 | *4,780 | 4,100 | *3,100 | 2,680 | | | *1,740 | *1,740 |
| 1.5 m | kg | | | *8,870 | 6,600 | *5,470 | 3,720 | *3,550 | 2,510 | *2,340 | 1,810 | *1,860 | 1,780 |
| G.L. | kg | *15,000 | *15,000 | *3,990 | *3,990 | *5,690 | 3,510 | 3,740 | 2,390 | | | *2,100 | 1,800 |
| -1.5 m | kg | | | *7,360 | 6,340 | *5,390 | 3,450 | 3,690 | 2,340 | | | *2,570 | 1,970 |
| -3.0 m | kg | | | *6,040 | *6,040 | *4,470 | 3,510 | | | | | *3,100 | 2,460 |
| | | | | | | | | | | | | | Radius |
| | | | | | | | | | | | | | 4.67 m |
| | | | | | | | | | | | | | 6.15 m |
| | | | | | | | | | | | | | 7.00 m |
| | | | | | | | | | | | | | 7.45 m |
| | | | | | | | | | | | | | 7.57 m |
| | | | | | | | | | | | | | 7.38 m |
| | | | | | | | | | | | | | 6.85 m |
| | | | | | | | | | | | | | 5.90 m |

Note:

- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
- Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Bucket pin attachment point defined as lift point.
- The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lift capacities marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.
- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
- Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

STANDARD EQUIPMENT

ENGINE

- ISUZU MOTORS LIMITED 4JJ1XDDV A01, Diesel engine with turbocharger and intercooler, EU Stage V compliant
- Auto Idle Stop
- Automatic engine deceleration
- Batteries (2 x 12 V - 100 Ah)
- Starting motor (24 V - 4 kW), 50 amp alternator
- Engine oil pan drain cock
- Double element air cleaner
- Refueling pump

CONTROL

- Working mode selector (H-mode, S-mode and ECO-mode)
- Rotating & N&B piping (proportional hand controlled) (for mono boom only)
- E & N&B piping (proportional hand controlled) (for 2 piece boom only)
- Bucket link with lifting hook (boom and arm safety valves and overload alarm)

SWING SYSTEM & TRAVEL SYSTEM

- Swing rebound prevention system
- Straight propel system
- Two-speed travel with automatic shift down
- Sealed & lubricated track links
- HD 600 mm steel shoes
- Grease-type track adjusters
- Automatic swing brake
- Lower frame guard
- Rock guard for arm

MIRRORS, LIGHTS & CAMERAS

- Rear view mirror, rear view camera and right side view camera
- LED work lights : 2 on boom, 1 on upper frame, 2 on rear counterweight

OPTIONAL EQUIPMENT

- Various optional arms
- Wide range of shoes
- Front-guard protective structure (may interfere with bucket action)
- Additional counterweight (+ 600 kg)
- Cab top work LED lights (two lights)
- Mechanical suspension seat (Applicable for N&B piping)
- Rain visor (may interfere with bucket action)

Note: Standard and optional equipment may vary. Consult your KOBELCO dealer for specifics.

Bluetooth® is a registered trademark of the Bluetooth SIG Inc. *GRAMMER is trademark of GRAMMER AG. registered in Germany and other countries.

Note: This catalogue may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require. Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice.

Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** No part of this catalogue may be reproduced in any manner without notice.

CAB & CONTROL

- Two control levers, pilot-operated
- Horn, electric
- Integrated left-right slide-type control box
- LED door light (interior)
- Coat hook
- Large cup holder
- Detachable two-piece floor mat
- GRAMMER® air suspension seat with heater
- Retractable seatbelt
- Headrest
- Handrails
- Intermittent Parallel wiper with double-spray washer
- Skylight
- Openable top guard (ISO 10262: 1998)
- Tinted safety glass
- Pull-type front window and removable lower front window
- Easy-to-read 10-inch LCD SCREEN multi-display monitor
- DAB+ radio (FM/AM & AUX & USB & Bluetooth® & hands free telephone)
- 12 V converter
- Hands-free telephone
- USB port
- Automatic air conditioner
- Air conditioning system
- The air conditioning system on this machine contains fluorinated greenhouse gas HFC-134a (GWP 1430). Quantity of gas 0.8 kg (CO₂ equivalent 1.2 t)
- Sun screen
- Large footrest

SAFETY

- Emergency escape hammer

Enquiries To:

KOBELCO CONSTRUCTION MACHINERY EUROPE B.V.

Veluwezoom 15
1327 AE Almere
The Netherlands
www.kobelco-europe.com