



**KRAMER**  
*on the safe side*



## 3610

### Telehandlers

#### A hero with a strong arm

With an operating weight of 8,200 kg and compact dimensions, the 3610 achieves a maximum stacking height of 9.50 m and a maximum payload of 3,600 kg. The 3-part boom ensures maximum compactness. The vehicle has a length of only 5.03 m and is 2.28 m wide. The vehicle thus belongs to the class of "perfect all-rounders" for versatile use in the Kramer telescopic handler portfolio and is particularly popular in recycling.

**Cab heights:** Overall height of just 2.31 m with standard cab and 24-inch tyres as standard, optionally with a cab with increased height of 18 cm

**Increased safety:** Smart Handling, an intelligent overload system to prevent the machine from tipping longitudinally

**A lot of operating comfort:** Automatic bucket return to make machine operation easier

**Drive system:** Sensitive working and high pushing power as a result of the variable, hydrostatic drive system

**Visibility:** Perfect view of the working area due to the steeply sloping engine bonnet

## Technical Data

### ■ Standard engine data

Engine manufacturer	Deutz
Drive output	100 kW
Drive output	136 PS
at max. rpm	2,300 U/min
Cylinder capacity	3,621 cm <sup>3</sup>
Exhaust aftertreatment	DOC / DPF / SCR

### ■ Weights

Payload (max.)	3,600 kg
Payload at max. reach	400 kg
Payload at max. stacking height	1,450 kg
Stacking height (max.)	9,500 mm
Payload max. (LSP 500 mm)	3,600 kg
Operating weight	7,600 - 8,200 kg
Thrust force (max.)	50 kN
Lift capacity (max.)	43 kN

### ■ Filling levels

Tank capacity for fuel	100 l
Tank capacity for hydraulic oil	100 l
Tank capacity for urea solution	9.5 l

### ■ Drive system

Travel speed Standard	0-30 km/h
Travel speed Option 1	0-20 km/h
Travel speed Option 2	0-40 km/h
Differential lock	100% connectible in the front axle (Option)

### ■ Hydraulic system

Work hydraulics discharge volume (max.)	140 l/min
---	-----------


### ■ Steering

Steering angle max.	38 degree
---------------------	-----------

### ■ Noise characteristic values

Guaranteed sound power level LwA (operator's canopy)	106 dB(A)
Measured sound power level LwA	105.1 dB(A)
Sound pressure level at the operator's ear	72 dB(A)

## Dimensions

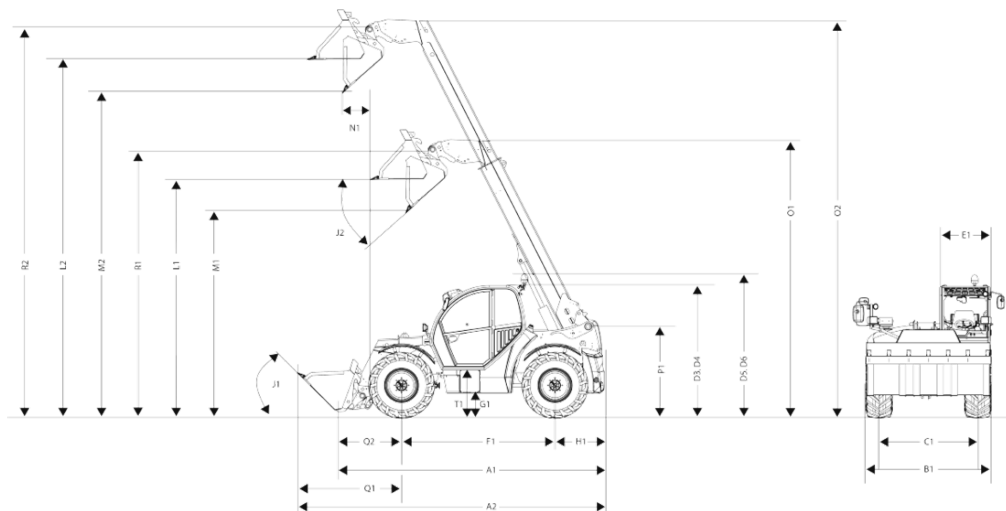

A1	Total length	5,030 mm
A2	Total length with bucket	5,830 mm
B1	Total width without bucket	2,285 mm
C1	Front track: rear	1,880 mm
D3	Total height of low cab	2,310 mm
D4	Total height of high cab	2,490 mm
D5	Total height of low cab with rotating beacon	2,540 mm
D6	Total height of high cab with rotating beacon	2,720 mm
E1	Cab width	990 mm
F1	Wheel base center	2,850 mm
G1	Ground clearance under axle and transmission, wading depth	415 mm
H1	Distance center rear wheel to rear	740 mm
I1	Rear approach angle (slope angle)	60 °
J1	Dumping angle	44 °
K1	Max. stacking height	9,500 mm
J2	Dumping angle	45 °
L1	Load-over height: retracted	4,700 mm
L2	Load-over height: extended	9,330 mm
M1	Dumping height: retracted	4,200 mm
M2	Dumping height: extended	8,760 mm
N1	Dumping width: extended	1,980 mm
O1	Tele extension length: retracted	5,480 mm
O2	Tele extension length: extended	10,120 mm
P1	Total height telescopic arm mounting in frame	1,600 mm
Q1	Distance center front wheel to bucket leading edge	2,250 mm
Q2	Distance center front wheel bearing quick change frame	1,440 mm
R1	Bucket pivot point: retracted	5,300 mm
R2	Bucket pivot point: extended	10,000 mm
S1	Turning radius outer edge wheels	3,840 mm
S2	Turning radius outer edge bucket	5,160 mm
T1	Entry height cab floor	720 mm